# 201-100 Stainless Steel Flush Fit Stud



## Description

Manufactured from Stainless Steel.

Machined polish finish as standard.

Constructed from non corrosive material.


Long Service life. To be installed onto finish surface.


### **Dimensions**

25mmø x 4mm thick top 25mm long x 10mmø threaded stud

### **Options**


Etched or polished finish
Sizes 40, 50, 75, 90, 105 and 120mm
Smooth topped version suitable for offhighway use such as car parks
Brass versions
Full installation service







### 201-100 Stainless Steel Flush Fit Stud Installation

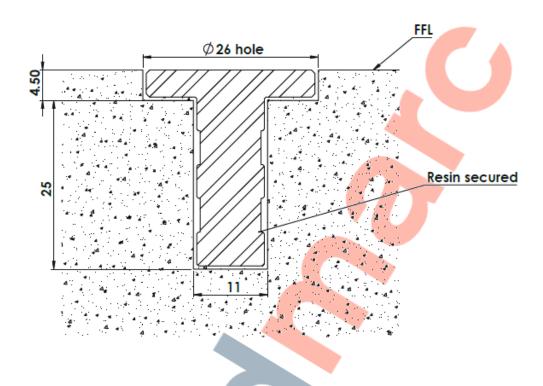


#### Installation

- 1. Drill holes 11mm & 26mm in diameter to the depths shown above.
- 2. Remove dust and debris caused by drilling.
- 3. Following the product guidelines heat the Polymer Modified Adhesive and pour a sufficient amount to fill the drilled hole.
- 4. Push the stud into the hole firmly ensuring an edge seal around the entire stud
- 5. Allow a few minutes for the Polymer Modified Adhesive to set.

### **Cleaning & Maintenance**

This product is designed for all weather exposure requiring only minimal maintenance as detailed below.

<u>Stainless Steel</u> Manufactured from premium Stainless Steel. Maintenance free, inspect fixing every 6 months. Add additional adhesive where required.

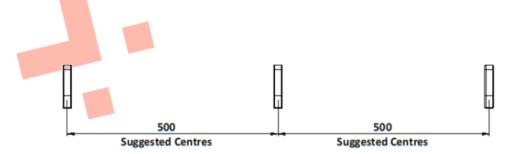



# 201-100 Stainless Steel Flush Fit Stud

