


## 202-102 Low Dome Anti-Slip Tactile Stud, 25mm

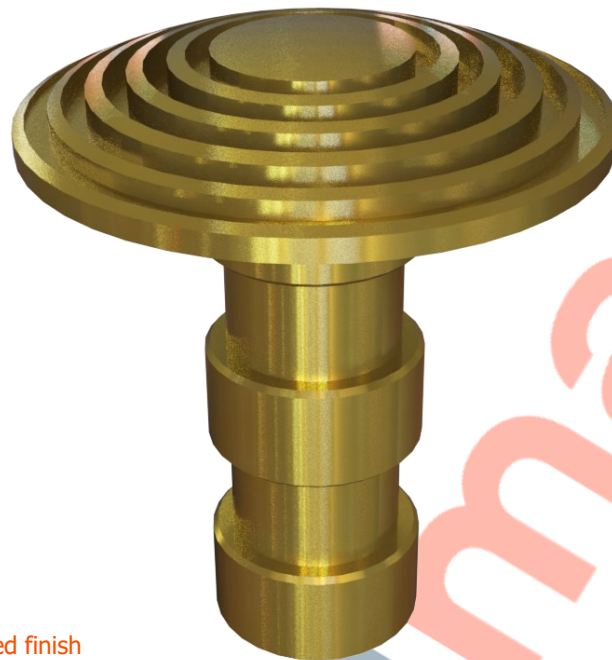

**Above.** Shown with machined finish

### Description

Manufactured from Brass.

Machined polish finish as standard.

Constructed from non corrosive material.

Long Service life.

To be installed onto finish surface.

### Dimensions

25mmø x 4mm thick top

25mm long x 10mmø threaded stud

### Options



Diameter options: 20mm - 120mm

### Material Options

Aluminium - Bronze - 316 S/S


### Finishing Options

Burnt - Bright Polish - Sandblasted - Plain Top

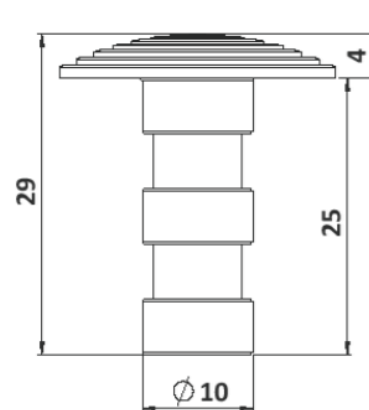

**Full installation service - POA**

# 202-102 Anti-Slip Tactile Stud Installation

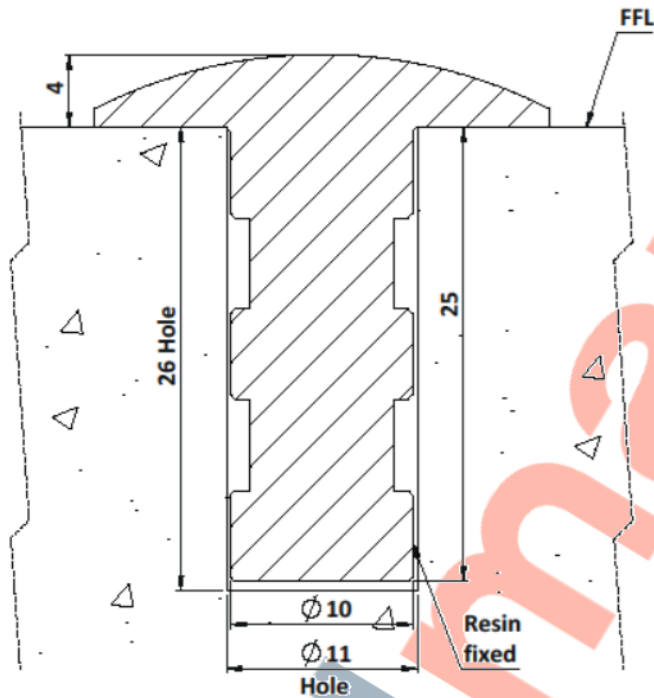


## Installation

1. Drill holes 11mm in diameter to the depths shown above.
2. Remove dust and debris caused by drilling.
3. Following the product guidelines heat the Polymer Modified Adhesive and pour a sufficient amount to fill the drilled hole.
4. Push the stud into the hole firmly ensuring an edge seal around the entire stud
5. Allow a few minutes for the Polymer Modified Adhesive to set.

## Cleaning & Maintenance

*This product is designed for all weather exposure requiring only minimal maintenance as detailed below.*

Brass: Manufactured from premium Brass. Maintenance free, inspect fixing every 6 months. Add additional adhesive where required.

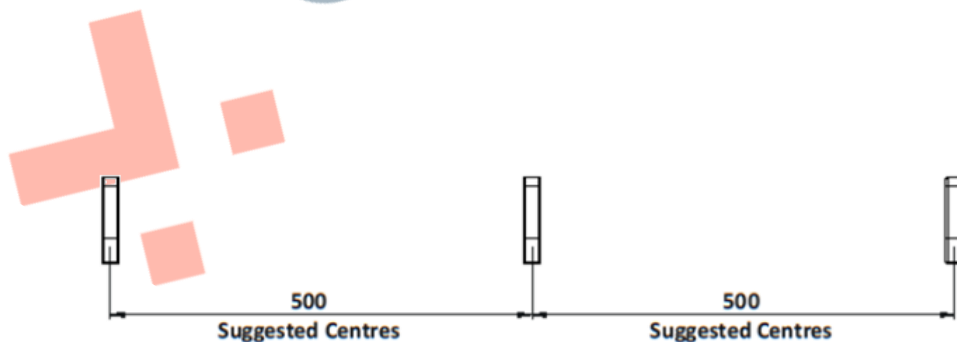

DATASHEET

## 202-102 Low Dome Anti-Slip Tactile Stud, 25mm

