

202-103 Demarcation Anti-Slip Stud Stainless Steel



Above. Shown with machined finish

Description


Manufactured from 316 Stainless Steel.
Machined polish finish as standard.
Constructed from non corrosive material.
Long Service life. To be installed flush with the ground

Dimensions


40mm ϕ x 4mm thick top
30mm long x 8mm ϕ threaded stud

Options

Etched or polished finish
Sizes 25, 50, 75, 90, 105 and 120mm
Smooth topped version suitable for off-highway use such as car parks
Bronze versions
Full installation service

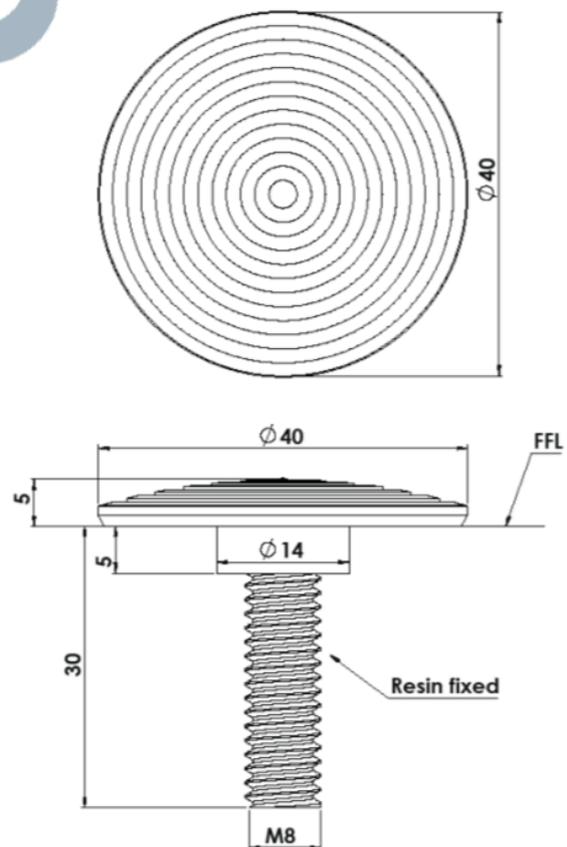

202-103 Demarcation Anti-Slip Stud Stainless Steel Installation

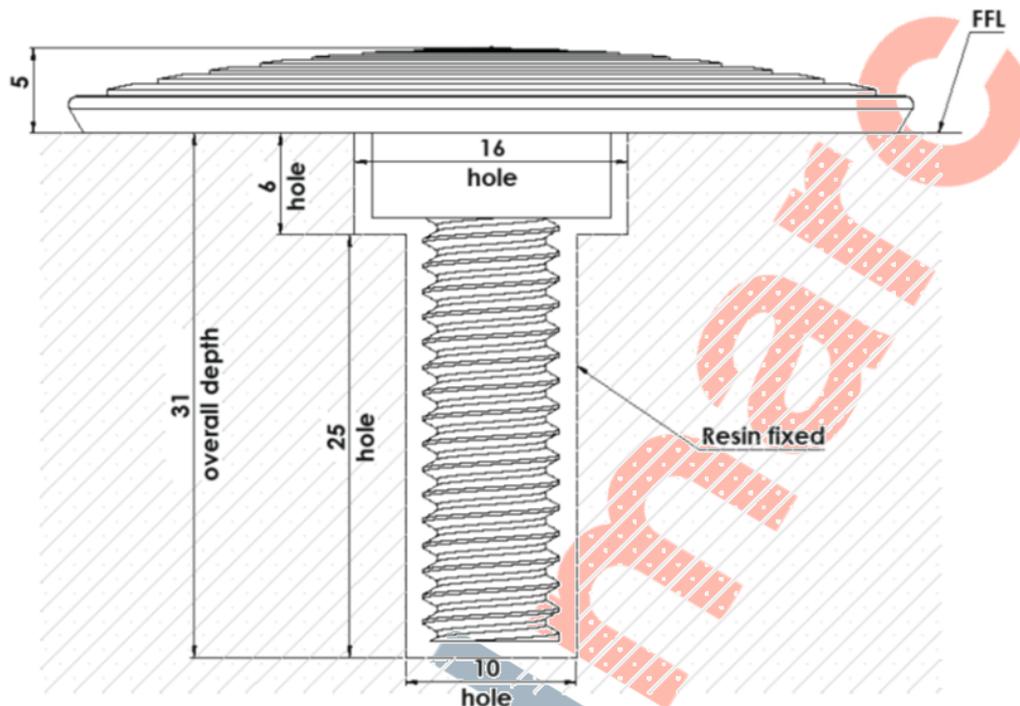


Installation

1. Drill hole 10mm in diameter to the 31mm depth shown above.
2. Drill second 16mm hole to the 6mm depth shown above
2. Remove dust and debris caused by drilling.
3. Following the product guidelines heat the Polymer Modified Adhesive and pour a sufficient amount to fill the drilled hole.
4. Push the stud into the hole firmly ensuring an edge seal around the entire stud
5. Allow a few minutes for the Polymer Modified Adhesive to set.

Cleaning & Maintenance

This product is designed for all weather exposure requiring only minimal maintenance as detailed below.

316 Stainless Steel: Manufactured from 316 Stainless Steel. Maintenance free, inspect fixing every 6 months. Add additional adhesive where required.

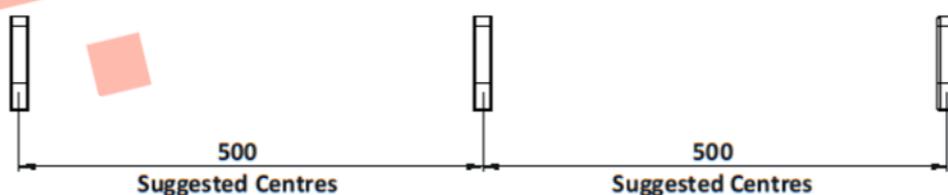

DATASHEET

202-103 Demarcation Anti-Slip Stud Stainless Steel



 **Studmarc**