

303-100 Tactile Warning Strip



Above. Shown with attractive machine finish

Description


Manufactured from 316 grade Stainless steel. Satin polish finish as standard. Strips provide an underfoot warning to identify hazards and dangerous areas where is a change in levels.

Dimensions

200 x 20 x 6mm thick
3no. 6mm CSK holes

Options

Bespoke sizing
Brass
Bronze
Full installation service

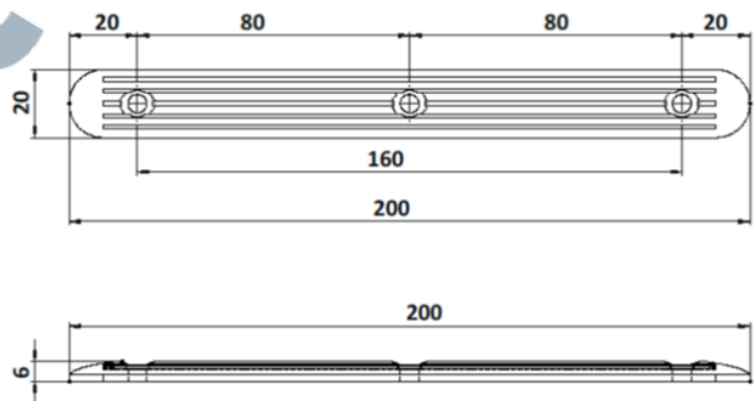

303-101 Tactile Warning Strip



Above. Shown with attractive machine finish

Description



Manufactured from 316 grade Stainless steel. Satin polish finish as standard. Strips provide an underfoot warning to identify hazards and dangerous areas where is a change in levels.

Dimensions


400 x 20 x 6mm thick
4no. 6mm CSK holes

Options

Bespoke sizing
Brass
Bronze
Full installation service

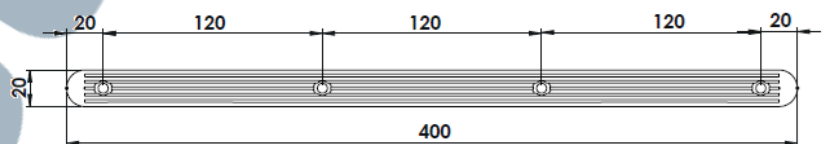

303-100 Tactile Warning Strip

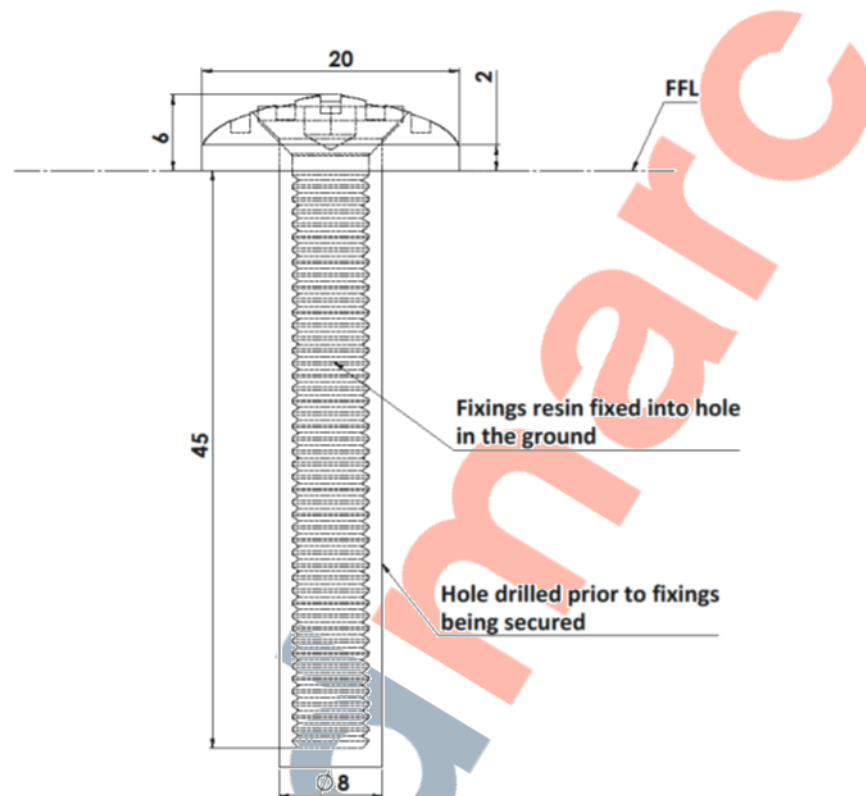


Installation

1. Use a drill to form the pilot holes as required for the CSK fixings.
2. Remove dust and debris caused by drilling.
3. If using ready mixed polyester resin apply a sufficient amount to half fill the slot, so the hole is completely filled once the M8 Fixing is inserted.
4. Allow a few minutes for the resin to set

Cleaning & Maintenance

This product is designed for all weather exposure requiring only minimal maintenance as detailed below.

Stainless Steel: Manufactured from premium Stainless Steel. Maintenance free, inspect fixing every 6 months. Add additional adhesive where required.

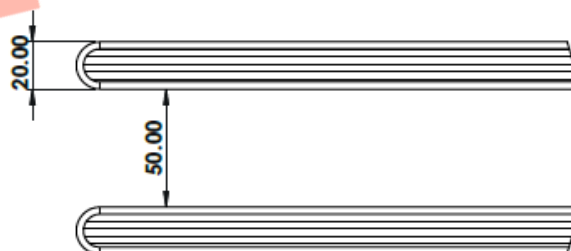

DATASHEET

303-100/101 Tactile Warning Strip

