


316L ST Stainless Steel Stud

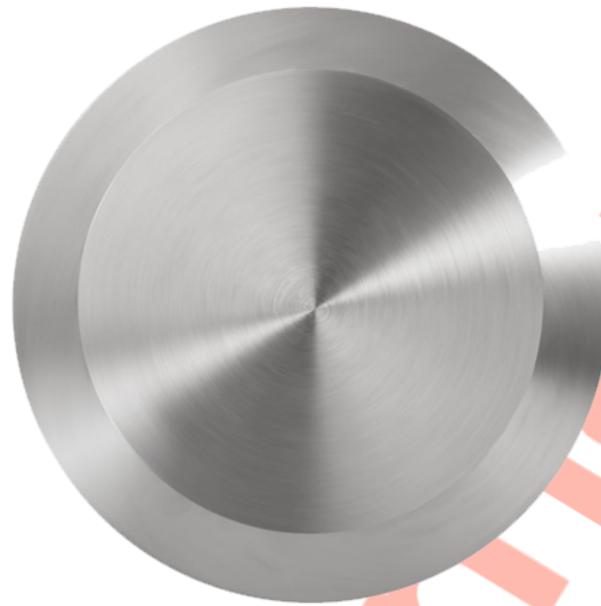

Above. Shown with machined

Description

Manufactured from 316L Stainless Steel.
Machined polish finish as standard.
Constructed from non corrosive material.
Long Service life. To be installed onto finished surfaces.

Dimensions

D1: 25mmØ D2: 15mmØ x 5mm thick top
M6 x 15mm welded pin
M6 x 12mm machined pin

Options

Diameter options: 15 - 100mm
Fixing pin length options - 12 - 30mm

Material Options


316L Stainless Steel
304 Stainless Steel
Aluminium

Fixing Pin Options


Welded pin
Machined pin

Vo pin

Full installation series

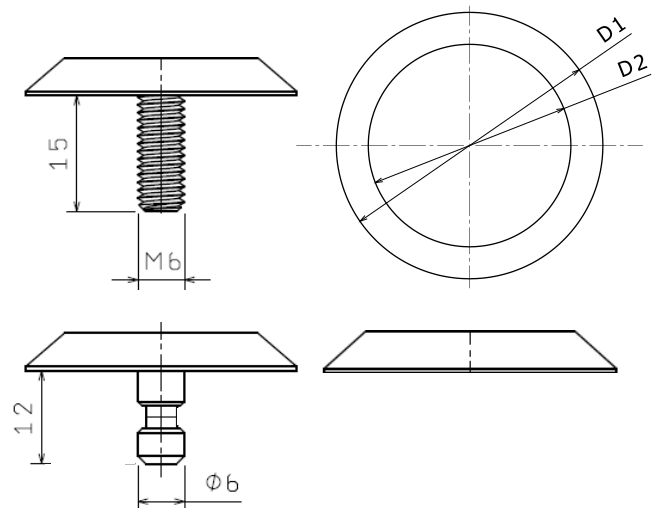

ST Stainless Steel Stud

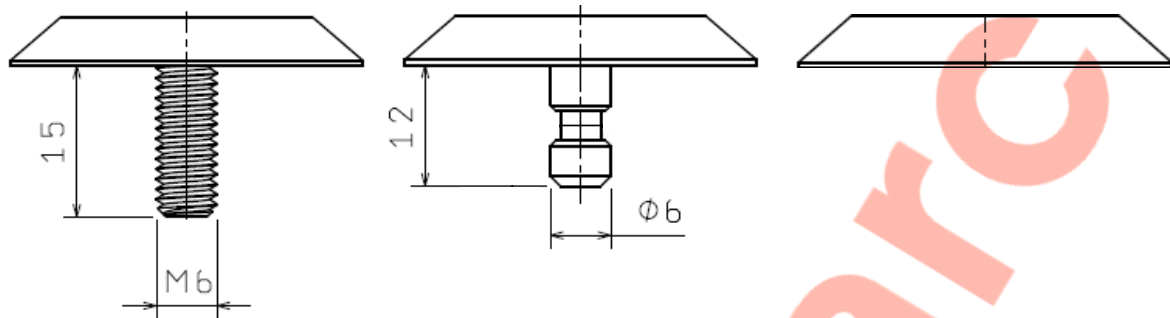

Installation Welded Pin

1. Drill holes 7mm dia x 16mm depth.
2. Remove dust and debris caused by drilling.
3. Following the product guidelines, screw the nozzle on, and press the trigger - the two part resin will mix in the nozzle. Pour a sufficient amount to fill the drilled hole.
4. Push the stud into the hole firmly ensuring an edge seal around the entire stud
5. Allow a few minutes for the Polymer Modified Adhesive to set.

Installation Machined Pin

1. Drill holes 7mm dia x 13mm depth.
2. Remove dust and debris caused by drilling.
3. Following the product guidelines, screw the nozzle on, and press the trigger - the two part resin will mix in the nozzle. Pour a sufficient amount to fill the drilled hole.
4. Push the stud into the hole firmly ensuring an edge seal around the entire stud
5. Allow a few minutes for the Polymer Modified Adhesive to set.

Installation Self Adhesive

1. Prep area where stud is to be situated by using a grease and dirt remover, i.e white spirits. Then let dry thoroughly.
2. Once area is dried, peel backing to stud off and press down firmly.

Note: We highly recommend only using the self-adhesive studs on tiled floors.

For layout suggestions please refer to the below.

<https://www.studmarc.com/knowledge-base/how-far-apart-should-tactile-studs-be-installed-from-each-other/>