202-102 Demarcation Anti-Slip Stud - Brass



Above. Shown with machined finish

Description


Manufactured from brass. Satin polish finish as standard. Constructed from non corrosive material. Long Service life. To be installed flush with the ground


Dimensions

25mmø x 4mm thick top 25mm long x 10mmø threaded stud

Options


Etched or polished finish Sizes 40, 50, 75, 90, 105 and 120mm Smooth topped version suitable for offhighway use such as car parks Stainless steel versions Full installation service







202-102 Demarcation Anti-Slip Stud - Brass Installation

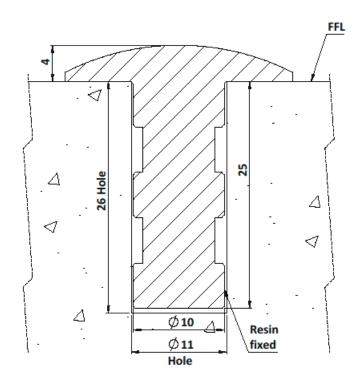

Installation

1. Drill holes 11mm in diameter to the depths shown above.

2. Remove dust and debris caused by drilling.

3. Following the product guidelines heat the Polymer Modified Adhesive and pour a sufficient amount to fill the drilled hole.


4. Push the stud into the hole firmly ensuring an edge seal around the entire stud


5. Allow a few minutes for the Polymer Modified Adhesive to set.

Cleaning & Maintenance

This product is designed for all weather exposure requiring only minimal maintenance as detailed below.

<u>Brass</u>: Manufactured from premium brass. Maintenance free, inspect fixing every 6 months. Add additional Adhesive where required.

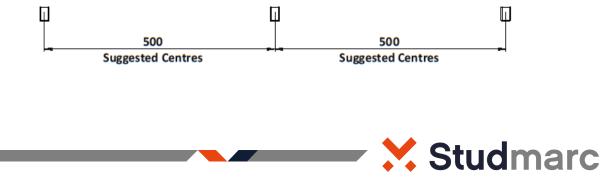

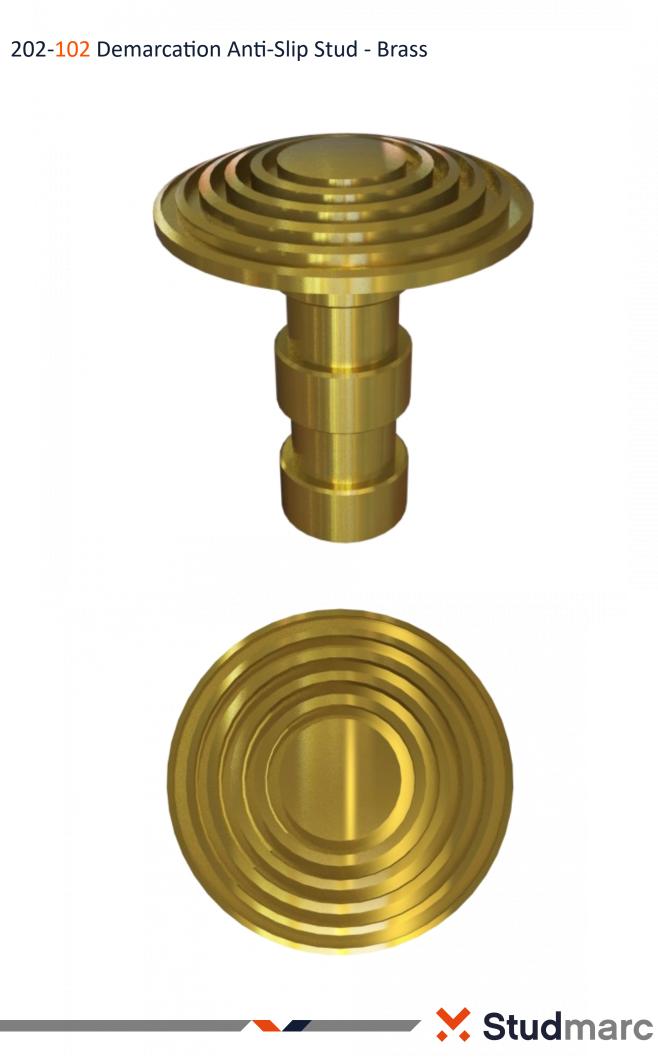

T: 01686 689 198 Trefeglwys Road, Ca

Trefeglwys Road, Caersws, Powys, SY17 5HH

sales@studmarc.com

